# ISOKERIN° Fireplaces & Chimneys Fireplaces, Accessories & Venting Solutions 26/11/13









## ICELAND

## Contents.

The Standard	
Specifications	page
The Magnum	
Specifications	page
The Magnum+	
Specifications	
The Maximus	1
Specifications	page 1
The Bvetto	1
Specifications	page 1
The Vent-Free	1!
Specifications	page 1
DM54 Chimney	1
Specifications	page 1
EM40 Chimney	19
Specifications	page 2
Fireplace Enhancements	2
Firebrick	page 2
Isoflames	page 2
Premium Log Sets	page 2
Fire-Lite	page 2
Green Tech.	page 2
Elemetal Chimney Pots	page 2
EcoSteel & EcoSteel+	page
<b>Outdoor Solutions</b>	3
Isopanels	page
Kitchen Systems	page



## Did You **KNOW?**

Our pumice ships directly from the Mount Hekla Volcano in Iceland to our state-of-the-art automated manufacturing facility in Chesapeake, Virginia.



# Talent is a Flame, Genius is a Fire.

~ Bernard Williams

# Insight into Our Technology

Our modular components cradle the raw power of fire in the safest, most energy-efficient material on earth. Due to the material's properties, the components are lightweight, while retaining UL 127 for Modular Masonry Fireplaces and UL 103HT for our Dual Modular Chimney System (respectively) listings. Isokern allows architects and their clients to pursue their most inspired designs, while connecting with the natural beauty of fire in a way that, until now, only nature could.

Our in-house designers and engineers work hand in hand with specification professionals for residential, commercial and institutional projects across North American.



Indoor Outdoor

Wood

Natural Gas

LP (Liquid Propane)

**Custom Finish** 

Multi-Sided Availability

DM 54 Chimney | page 17

Eco-Steel Chimney | page 31

Fire-Lite Application | page 27

Make your ideal dream home a dream come true with Isokern's **Standard Series.** 


As the first Isokern modular fireplace introduced in the United States, the modular construction of the Standard Series allows you to unleash your creative desires with a fireplace as unique as you are. Whether you choose wood burning, natural gas or liquid propane, the Standard Series sets the standard. In an outdoor application, this fireplace can be finished with any veneer including brick, stone, stucco, or tile.

#### **Specifications**


Please Note: When using the Isokern brick ledge it is required that the firebox/smoke dome assembly include the placemaent of a 4" by 4" by 3/8" minimum steel angle across the firebox opening. This item can be sourced locally.

		Framing	& Weight	
Мос	lel	Minimum	Framing	Weight
36	(46	"w) x (65"h)	x (26 3/4"d)	1205 lbs
42	(52	"w) x (65"h)	x (26 3/4"d)	1325 lbs
46	(56	"w) x (65"h)	x (26 3/4"d)	1450 lbs


#### Front View



#### Side View




#### **Plan View**



<b>&gt;</b>	Model	А	В	С	D	Е	F	G
View	36	33"	63 1/4"	31 1/2"	27 1/4"	37 1/8"	43"	10 1/2"
Front	42	33"	63 1/4"	31 1/2"	33 1/4"	43 1/8"	49"	10 1/2"
댦	46	43"	63 1/4"	31 1/2"	37 1/4"	47 1/8"	53"	10 1/2"

>	Model	В	С	Н	I	J	K	L	М
Vie	36	63 1/4"	31 1/2"	25 1/4"	28 3/4"	34 1/2"	16"	8"	5"
Side	42	63 1/4"	31 1/2"	25 1/4"	28 3/4"	34 1/2"	16"	8"	5"
Si	46	63 1/4"	31 1/2"	25 1/4"	28 3/4"	34 1/2"	16"	8"	5"

}	Model	D	Е	F	S	Т
Vie	36	27 1/4"	37 1/8"	43"	25 1/4"	20 1/4"
an	42	33 1/4"	43 1/8"	49"	25 1/4"	20 1/4"
Ë	46	37 1/4"	47 1/8"	53"	25 1/4"	20 1/4"

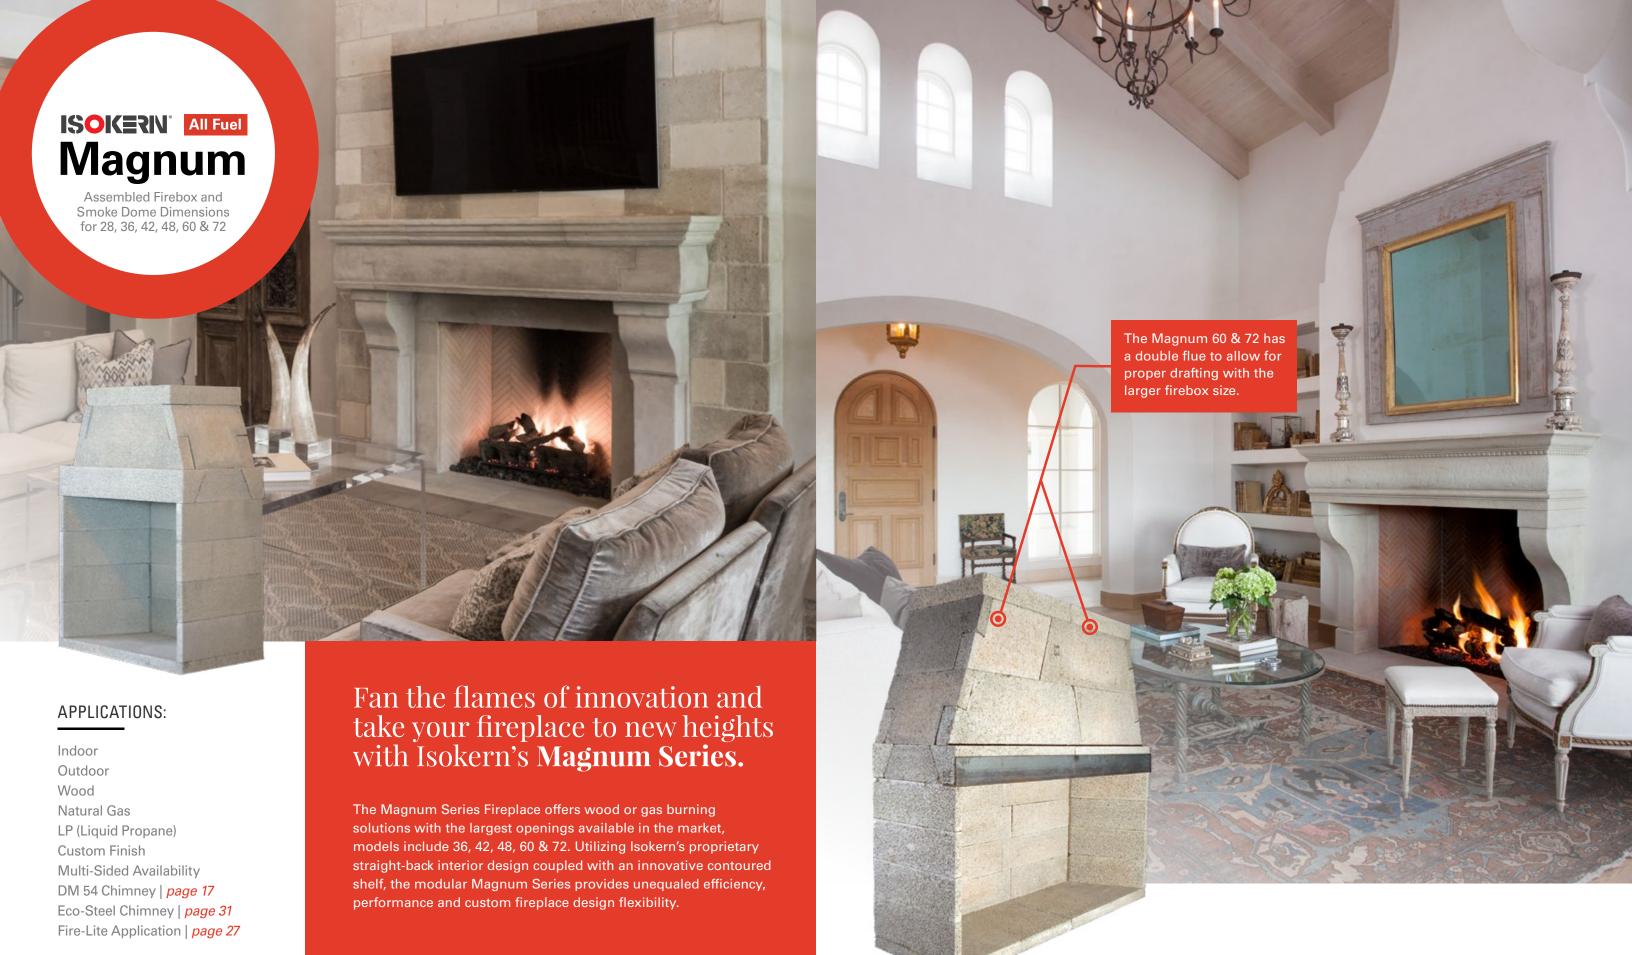

#### **Specifications - 28, 36, 42, 48**

Please Note: When using the Isokern brick ledge, it is required that the firebox/smoke dome assembly include the placement of a 4" x 4" x 3/8" minimum steel angle across the firebox opening. This item can be sourced locally.


	Framing & Weight	
Model	Minimum Framing	Weight
28	(38 1/2"w) x (61 1/2"h) x (29 1/2"d)	1040 lbs
36	(46"w) x (71"h) x (29 1/2"d)	1305 lbs
42	(52"w) x (71"h) x (29 1/2"d)	1425 lbs
48	(56"w) x (71"h) x (29 1/2"d)	1600 lbs

#### Specifications 60 & 72


Please Note: It is required that the firebox/smoke dome assembly include the placement of a 4" x 6" x 3/8" minimum steel angle across the firebox opening. This item can be sourced locally. The manufacturer requires for the 60 & 72 model fireboxes be lined with a minimum 1-1/4" (2-1/2" Fire-lite application) thick firebrick for the floor and backwall and four inch (4") firebrick on the sidewalls.

	Framing & Weight	
Mode	el Minimum Framing	Weight
60	(76 1/2"w) x (87 1/4"h) x (29 1/2"d)	2652 lbs
72	(88 7/8"w) x (87 1/4"h) x (29 1/2"d)	2952 lbs


#### **Front View**







#### **Plan View**




T	- D	S
	Е	 ·
•	F	

>	Model	А	В	С	D	Е	F	G
Viev	28	22 1/4"	60 1/4"	28 1/2"	19 3/4"	31"	35 1/2"	9 1/2"
, <u>F</u>	36	33"	69 3/4"	38"	27 1/4"	38 3/4"	43"	9 1/2"
Front	42	33"	69 3/4"	38"	33 1/4"	44 1/2"	49"	9 1/2"
т.	48	43"	69 3/4"	38"	37 1/4"	48 1/2"	53"	9 1/2"


	Model	В	С	Н	1	J	K	L	М
/iew	28	60 1/4"	28 1/2"	25 1/4"	28 3/4"	31 1/2"	16"	8"	5"
	36	69 3/4"	38"	25 1/4"	28 3/4"	41"	16"	8"	5"
Side	42	69 3/4"	38"	25 1/4"	28 3/4"	41"	16"	8"	5"
-0,	48	69 3/4"	38"	25 1/4"	28 3/4"	41"	16"	8"	5"

	Model	D	Е	F	S	Т
<u>e</u> .	28	19 3/4"	31"	35 1/2"	28"	23"
>	36	27 1/4"	38 3/4"	43"	28"	23"
Plan	42	33 1/4"	44 1/2"	49"	28"	23"
	48	37 1/4"	48 1/2"	53"	28"	23"


#### **Front View Side View**

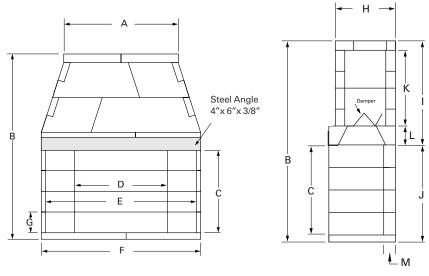

#### **Top View**



#### **Plan View**



Ŋ	Model	А	В	С	D	Е	F	G
Vie	60	53 1/2"	85 3/4"	38"	57 1/4"	69"	73 1/2"	9 1/2"
Front	72	66"	85 3/4"	38"	69 3/4"	81 1/4"	85 1/2"	9 1/2"

}	Model	В	С	Н	I	J	K	L	М
Vie	60	85 3/4"	38"	25 1/4"	44 3/4"	41"	32"	8"	5"
Side	72	85 3/4"	38"	25 1/4"	44 3/4"	41"	32"	8"	5"
S									

}	Model	D	Е	F	S	Т
Viev	60	57 1/4"	69"	73 1/2"	28"	23"
Plan '	72	69 3/4"	81 1/4"	85 1/2"	28"	23"



# ISOKERN All Fuel Magnum ±


When you're designing a space that's larger than life, you need a fireplace to match it! **NEW from Isokern is our ground-breaking MagnumE Fireplace**.

Boasting widths up to 10 feet and finished opening heights of 44", this stately fireplace is the largest UL listed fireplace on the market. Earthcore is always looking to expand the boundaries of fire, and with the Magnum fire has no boundaries.

\* Angle iron support not pictured but required.

#### Solid Fuel or Gas

The largest UL listed wood burning fireplace on the market.

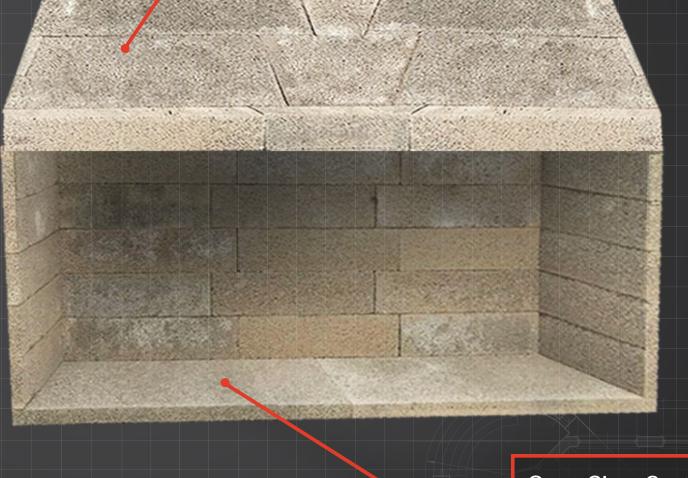


Open Sizes Customized to Your Project

Opening widths of up to 10 feet.

#### **Specifications - 84, 96, 108, 120**


**Please Note:** It is required that the firebox/smoke dome assembly include the placement of a 6" x 6" x 3/4" minimum steel angle across the firebox opening. This item can be sourced locally. Eco-Steel or Eco-Steel+ is the required flue system for this fireplace. The 84 Magnum+ requires 3 flue outlets. Models 96-120 require 4 flue outlets\*.

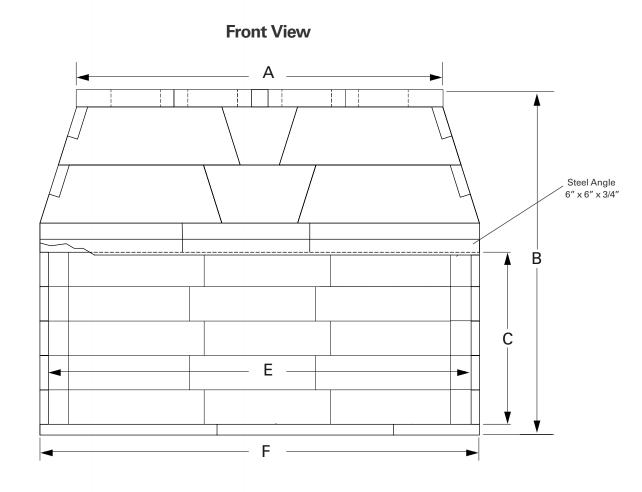


1	Model	А	В	С	Е	F
<u>ë</u>	84	74 11/16"	94 1/2"	47 1/16"	91 1/16"	95 11/16"
t <	96	88 1/16"	93 11/16"	47 1/16"	103 5/8"	108 3/16"
ront	108	100 3/16"	94 1/2"	47 1/16"	115 5/8"	120 3/16"
ш	120	111 5/8"	94 1/2"	47 1/16"	127 1/8"	131 3/4"




#### Side View

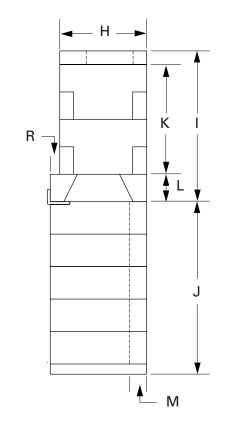

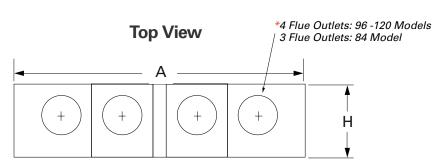

#### **Plan View**

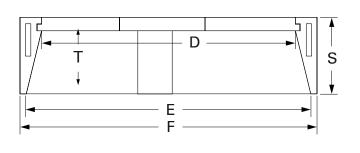

	Model	D	Е	F	S	Т
View	84	83 1/16"	91 1/16"	95 11/16"	28"	23"
	96	95 5/8"	103 5/8"	108 3/16"	28"	23"
Plan	108	107 5/8"	115 5/8"	120 3/16"	28"	23"
-	120	119 1/8"	127 1/8"	131 3/4"	28"	23"

	Model	Н	I	J	K	L	М	R
View	84	25 1/4"	44 3/4"	50 1/2"	32"	8"	5"	2 3/4"
<b>&gt;</b>	96	25 1/4"	44 3/4"	50 1/2"	32	8"	5"	2 3/4"
Side	108	25 1/4"	44 3/4"	50 1/2"	32"	8"	5"	2 3/4"
-0,	120	25 1/4"	44 3/4"	50 1/2"	32"	8"	5"	2 3/4"



Indoor
Natural Gas
LP (Liquid Propane)
Custom Finish
Direct Vent Chimney | page 17
Combustible Floor Installation

Put the awe-inspiring power of fire on full display with Isokern's **Maximus Series.** 


The Isokern MAXIMUS Series is the first ever masonry direct vent fireplace. Offering an expansive ceramic glass opening with Invisi-Barrier and Triple Stadium Burner for exceptional appearance and flame presentation. With an array of options, the MAXIMUS provides endless possibilities for making your space warm and inviting.

#### **Specifications**


Please Note: Additional clearance of 12" may be required from side wall where the air intake is located. The air intake is listed at zero (0") clearance to combustible framing and can be routed through framing if required.

Framing & Weight								
Model	Minimum Framing	Weight						
46	(56"w) x (65"h) x (26 3/4"d)	1450 lbs						
48	(56"w) x (71"h) x (29 1/2"d)	1600 lbs						


#### **Front View**



#### Side View



#### **Plan View**



Š	Model	А	В	С	D	Е	F	G	N
Vie	46	43"	63 1/4"	31 1/2"	37 1/4"	47 1/8"	53"	10 1/2"	11 3/4"
Front	48	43"	69 3/4"	38"	37 1/4"	48 1/2"	53"	9 1/2"	11 3/4"

}	Model	В	С	Н	1	J	K	L	М
Vie.	46	63 1/4"	31 1/2"	25 1/4"	28 3/4"	34 1/2"	16"	8"	5"
Side 1	48	69 3/4"	38"	28"	28 3/4"	41"	16"	8"	5"

≥	Model	D	Е	F	S	Т
Viev	46	37 1/4"	47 1/8"	53"	25 1/4"	20 1/4"
Plan 1	48	37 1/4"	48 1/2"	53"	28"	23"



Indoor
Natural Gas
LP (Liquid Propane)
B-Vent Chimney
Combustible Floor Installation
Custom Finish


Opening heights sure to make a true statement in any living space with Isokern's **Bvetto Series**.


As the first and only field assembled gas appliance fireplace, the Isokern Bvetto Series offers the largest available opening heights in the industry of 52." With our proprietary quick fire ignition system, the Isokern Bvetto comes complete with our exclusive Isoflames Stadium Burner and Remote Electronic Ignition.

#### **Specifications**

**Please Note:** Different height options are available for the Bvetto fireplace. One additional backwall and two additional sidewalls can be added to obtain an opening of 42" tall before brick is installed. Two additional backwalls and four additional sidewalls can be added to obtain an opening of 52½" tall before brick is installed. Only Isoflames log sets can be used in this unit.

	Framing & Weight								
Model	Minimum Framing	Weight							
36	(46"w) x (65"h) x (26 3/4"d)	1500 lbs							
46	(52"w) x (65"h) x (26 3/4"d)	1700 lbs							

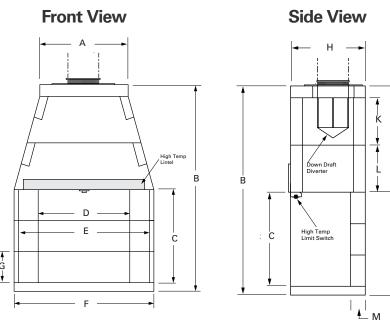



Š	Model	А	В	С	D	Е	F	G
Viev	36	22 1/2"	71 1/4"	31 1/2"	27 1/4"	36 1/8"	43"	10 1/2"
Front \	46	33 1/2"	71 1/4"	31 1/2"	37 1/4"	48 1/8"	53"	10 1/2"

>	Model	В	С	Н	1	J	K	L	М
Vie	36	71 1/4"	31 1/2"	25 1/4"	36 3/4"	34 1/2"	16"	16"	5"
Side	46	71 1/4"	31 1/2"	25 1/4"	36 3/4"	34 1/2"	16"	16"	5"

}	Model	D	Е	F	S	Т
/ie	46	27 1/4"	36 1/8"	43"	25 1/4"	20 1/4"
Plan \	48	37 1/4"	48 1/2"	53"	25 1/4"	20 1/4"



**Custom Finish** 

Indoor
Outdoor
Natural Gas
LP (Liquid Propane)
Unvented
Multi-Sided Availability
Combustible Floor Installation

A gas fireplace blends seamlessly into your home's footprint, with Isokern's **Vent-Free Series**.


The Vent-Free series offers a variety of opening heights and is fully customizable to fit in with any design plan. With its large finished openings and see-thru availability, the Vent-Free Series is a perfect heating solution for any multi-family home, new home, remodeling project or outdoor concept.

#### **Specifications**


Please Note: Zero clearance to combustible material.


Framing & Weight					
Mod	lel Minimum Framing	Weight			
36	(46"w) x (65"h) x (26 3/4"d)	1205 lbs			
42	(52"w) x (65"h) x (26 3/4"d)	1325 lbs			
46	(56"w) x (65"h) x (26 3/4"d)	1450 lbs			

#### **Front View**



#### Side View






Ņ	Model	В	С	D	Е	F	G
Viev	36	63 1/4"	31 1/2"	27 1/4"	37 1/8"	43"	10 1/2"
ont	42	63 1/4"	31 1/2"	33 1/4"	43 1/8"	49"	10 1/2"
Fron	46	63 1/4"	31 1/2"	37 1/4"	47 1/8"	53"	10 1/2"

>	Model	В	С	Н	1	J	K	L	М
Vie.	36	63 1/4"	31 1/2"	25 1/4"	28 3/4"	34 1/2"	16"	8"	5"
Side	42	63 1/4"	31 1/2"	25 1/4"	28 3/4"	34 1/2"	16"	8"	5"
Š	46	63 1/4"	31 1/2"	25 1/4"	28 3/4"	34 1/2"	16"	8"	5"

>	Model	D	Е	F	S	Т
Vie	36	27 1/4"	37 1/8"	43"	25 1/4"	20 1/4"
Plan <sup>v</sup>	42	33 1/4"	43 1/8"	49"	25 1/4"	20 1/4"
Ë	46	37 1/4"	47 1/8"	53"	25 1/4"	20 1/4"

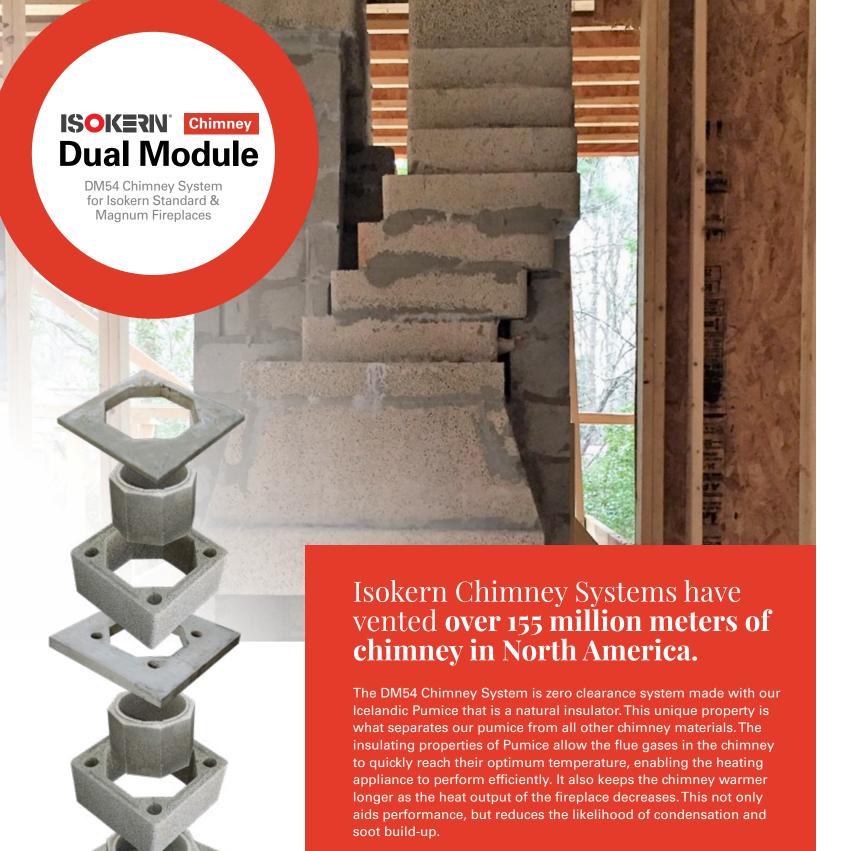


Our Component based system is made up of inner and outer blocks that are laid with staggering joints for safety and stability. The double layer of pumice blocks, separated by an air gap, maximizes the chimney insulation. This system is the only masonry chimney system tested and listed to UL 103HT (2100° High Temperature) standards.

#### **Specifications**




Please Note: The DM54 Chimney system is zero clearance to combustible materials. Offset Blocks offer the ability to move a vertical chimney from side to side, allowing it to pass objects above the firebox. Offset blocks require 1 1/2" clearance to combustible material. "Combustibles" are defined as "normal construction materials" and are considered to be: wood framing materials, particle board, mill board, plywood sub-flooring, plywood paneling and wood flooring.


Starter	А	В	С
Block	16 1/2"	14"	6"



Outer	А	В	С
Casing	21 1/2"	21 1/2"	12"




Inner Flue	А	В	С
Liner	16 1/2"	14"	12"




$\lambda \lambda$
A B
c ±

D. III.	А	В	С
Brickledge	31 1/2"	31 1/2"	3"

Small	А	В	С	D
Crown Cap	26 1/4"	26 1/4"	1 1/4"	3"




Large	А	В	С	D
Crown Cap	37 1/2"	37 1/2"	1 1/4"	3"



Offset	А	В	С	D	Е
Block	21 1/2"	25"	11"	3"	6"

#### Isocaps

Specifically designed by Earthcore for the Isokern DM54 flue liner, Iso-Cap installation is minimal. Sealed with silicone caulk, each Iso-Cap simply slides into or over the inner flue liner of the DM54 Chimney.







# ISOKERIN® Chimney Mono Flue

EM40 Chimney System for Isokern Standard & Magnum Fireplaces

**Outdoor ONLY** 





# Isokern Chimney Systems have vented **over 155 million meters of chimney in North America.**

Our 16" Diameter EM 40 Universal Flue is the largest insulating masonry chimney available. With proprietary "Air-Vent" technology, it will not crack like cheaper concrete alternatives. Used exclusively for outdoor applications. It requires a 2" clearance to combustible materials.

#### **Fireplace & Chimney Accessories**



#### **EM 40 Mono Flue Cap**

Specifically designed for the Isokern 16" EM-40 Mono Flue, this Stainless Cap is easily installed. This cap slides on top of the EM-40 Mono Flue.



#### **Cast Iron Damper**

This Cast Iron damper is designed to sit in the throat of the Isokern fireplace and can be opened and closed with the poker control. Sizes Available: 33", 42", 60" & 72"




#### **Sealed Cast Iron Damper**

Our New Sealed Cast Iron dampers substantially prevent air from escaping the chimney while also preventing outside air from entering the home. This damper utilizes a high temperature fiberglass gasket to form a tight seal, offering energy efficiency for masonry fireplaces without the use of glass doors or chimney top dampers. Sizes Available: 33" & 42"



#### **Bottom Mount Damper**

The Bottom Mount Damper is a proprietary design to be used when a conventional poker or top-mount damper is not feasible. Great with see-through applications, this type of damper can be paired with either the DM54 or Steel Chimney Systems.



#### **Cast Iron Grates**

Stop struggling with fireplace grates that don't hold logs in the right location in your fireplace and have poor ventilation. With these Cast Iron Fireplace Grates in your fireplace, those concerns will be a thing of the past!

XB SIZES AVAILABLE: 24", 30", 36"

HL SIZES AVAILABLE: 23", 27"



#### **Earthcore Isokern Adhesive**

The Earthcore Adhesive, is a thin-set masonry adhesive, which can be used in either interior or exterior installation. Properly mortared fireboxes and smoke dome assemblies require approximately five gallons (dry measure) of Earthcore Adhesive. 1 pail per 12' of DM54.

#### **Outside Air Kit**

Our Outside Air Kits are available with 4" diameters. These kits help prevent back draft smoking caused by negative pressure in the home.



Outside Air Kit Stainless Steel Door
Part #OAKS



Outside Air Kit Matte Black Steel Door Part #OAKB





#### STANDARD FIREBRICK SIZES:

Fulls: 9" x 4 1/2" x 2 1/2" Splits: 9" x 4 1/2" x 1 1/4" Soaps: 9" x 2" x 1 1/4"\*

\*Red & Cream Firebrick ONLY

## Make your fireplace a part of your home's decor with Isokern's Firebrick options.

Typically made of fire clay or siliceous material, our Firebrick is a refractory brick, capable of sustaining intense heat without fusion. And since it's not prone to expansion or contraction, this material helps minimize cracking under extreme heating conditions. Coloration and size varies slightly.

#### **Available Colors:**



**Pattern Guide:** 





\*R = Running Bond



#### **Isoset FireBrick Mortar**

Isoset Brick Mortar, a thinset masonry adhesive, can be used in either interiors

or exteriors for laying of firebrick. It is the specified firebrick mortar to be used in all Isokern Fireplaces. Isoset is available in 50lb buckets, approximately 50 lbs of prepared mortar will lay firebrick for fireplaces up to 48".

7	36	42	46
Standard	R Full/Split: 100	R Full/Split: 100	R Full/Split: 100
	H Full/Split: 120	H Full/Split: 120	H Full/Split: 120
Sta	R Soaps: 200	R Soaps: 200	R Soaps: 200
	H Soaps: 240	H Soaps: 240	H Soaps: 240



#### \*Please Note:

4" firebrick must be used on the side walls of these units. To achieve this for the Magnum 60 & 72 models, you will need 60 additional full or split firebricks. To achieve this for the Magnum+ models, you will need 70 additional full or split firebricks.

Ε	28	36	42	48	<b>*</b> 60	*72
gnu	R Full/Split: 100	R Full/Split: 100	R Full/Split: 120	R Full/Split: 130	R Full/Split: 160	R Full/Split: 180
	H Full/Split: 120	H Full/Split: 140	H Full/Split: 140	H Full/Split: 150	& Full/Split: 60	& Full/Split: 60
Ma	R Soaps: 200	R Soaps: 240	R Soaps: 240	R Soaps: 260	H Full/Split: 180	H Full/Split: 200
	H Soaps: 240	H Soaps: 280	H Soaps: 280	H Soaps: 300	& Full/Split: 60	& Full/Split: 60





±	*84	<b>*</b> 96	*108	*120
Magnum+	R Full/Split: 220	R Full/Split: 250	R Full/Split: 270	R Full/Split: 290
	& Full/Split: 70	& Full/Split: 70	& Full/Split: 70	& Full/Split: 70
Mag	H Full/Split: 240	H Full/Split: 270	H Full/Split: 300	H Full/Split: 320
	& Full/Split: 70	& Full/Split: 70	& Full/Split: 70	& Full/Split: 70



<u> </u>	46	48
Maximus	R Full/Split: 100 H Full/Split: 120	R Full/Split: 130 H Full/Split: 150
Ma	R Soaps: 200 H Soaps: 240	R Soaps: 260 H Soaps: 300



	36	46	per extension
retto	R Full/Split: 100	R Full/Split: 100	R Full/Split: 20
Bvet	H Full/Split: 120	H Full/Split: 120	H Full/Split: 25
	R Soaps: 200	R Soaps: 200	R Soaps: 40
	H Soaps: 240	H Soaps: 240	H Soaps: 50



φ	36	42	46
Vent-Free	R Full/Split: 100	R Full/Split: 100	R Full/Split: 100
	H Full/Split: 120	H Full/Split: 120	H Full/Split: 120
Ver	R Soaps: 200	R Soaps: 200	R Soaps: 200
	H Soaps: 240	H Soaps: 240	H Soaps: 240



earthcore

## ISOKERN' Log Sets Isoflames

Log sets for all vented and ventless gas burning Isokern Fireplaces



Our Vented and Vent-free Isoflame Gas Log Sets have lively flames and large ember beds to highlight our remarkable craftsmanship. With efficient heat and unmatched beauty, each log set comes with a flame height remote control and electric ignition.

#### Isoflames

#### **Vented Log Sets**

The Isoflames three tiered burner system creates high and full bodied flames... while using fewer BTU's than other vented burner systems. Featuring an Indoor (Black) burner with three log set options: Sandhill Oak, Charred Hickory or Summit Pine. Available Sizes include: 24" & 30"



Summit Pine





### Isoflames Vent-Free Log Sets

Lively flames and a large ember bed highlight the handcrafted logs, adding efficient heat and unmatched beauty to your fireplace. Featuring either an Indoor (Black) or Outdoor (Stainless) burner with two log set options: Twilight Split or Aged River Pine. Available Sizes include: 24" & 30"





Aged River Pine

## Premium

Log sets for Magnum and Standard gas burning fireplaces

Premium Gas Logs for Magnum Fireplaces



Change the look of your fireplace instantly with Isokern's **Premium Log Sets.** 

Our Premium Log Sets are individually cast and hand painted to perfection by artists creating the most realistic looking logs on the market. Found and made in America.

#### About

#### **Premium Gas Logs**

Whether you just need to replace your existing worn out logs or you need to convert your wood burning fire box into a gas fireplace, our Premium Gas Logs are the perfect place to start. Their life like quality dramatically increase the athestic appearance of your fireplace and even the burners create an ambiance of tranquility while in use. All of our products are easy to install for any licensed contractor.

#### Premium Gas Logs for

#### **Magnum & Standard Fireplaces**






Coastal Driftwood 3 BURNER SERIES 24" - 42"





Take the wonderful ambience of fire anywhere in your home with Isokern's **Fire-Lite Application.** 

Using the Metal Stand in the Fire-Lite Application, both the Isokern Magnum and Standard Series can be placed directly on a combustible floor or be recessed into any combustible floor system including hearth extension as an approved, listed application with detailed plans available.

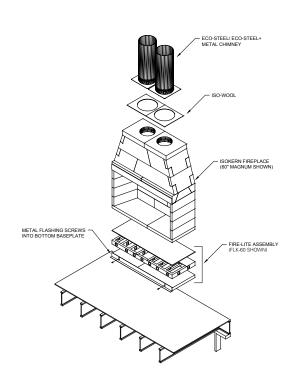







#### Enjoy the warmth of a wood burning fire while contributing to a cleaner environment.

The GreenTech Solution by earthcore can be easily installed in a matter of minutes and reduce particulate emissions by up to 80%. While your fireplace is in use, the direct flame cleans the Green Tech Catalytic Combuster, resulting in a maintenance free solution for cleaner air in and outside of your home. The Earthcore Exclusive Catalytic Combustor can be added to any Isokern Magnum or Standard Series fireplace.



**Eco-Steel Anchor Plate** 



Terracotta

Weathered Copper

Muskett



Give your venting custom style without the weight with Isokern's **Elemetal Chimney Pots.** 

Our Decorative Steel Pots have all the appeal of our popular traditional clay pots, at a fraction of the weight and cost. Earthcore's decorative steel pots are fashioned from 24" gauge, colored, Kynar steel. They are available in five standard colors and come with a 20-year warranty.



#### Glasgow

PROD# ROU3026 32" H | 28" Inside Diameter



#### Ontario

PROD#SQOCT-1932 38" H | 21" Inside Diameter



#### **Portsmouth**

PROD# OCT1930 36" H | 21" Inside Diameter



#### Dorchester

PROD# SQ-2326 46lbs 32" H | 21" Inside Diameter



#### King

COPPER: EC-O-2447-1-CO GRAY: EC-O-2447-1-GR Weight 36 lbs | Height 48" | Base 24"



#### Queen

COPPER: EC-O-2039-1-CO GRAY: EC-O-2039-1-GR Weight 26 lbs | Height 41" | Base 20"

Knight II

COPPER: EC-SQ-1633-1-CO

GRAY: EC-SQ-1633-1-GR

Height 38" | Base 16"



#### Knight I

COPPER: EC-SQ-2144-1-CO GRAY: EC-SQ-2144-1-GR Weight 36 lbs | Height 44" | Base 21"



#### Bishop I

COPPER: EC-R-2649-1-CO GRAY: EC-R-2649-1-GR Height 52" | Base 26"



#### Bishop II

COPPER: EC-R-2036-1-CO GRAY: EC-R-2036-1-GR Height 39" Base 20"



Give your fireplace

touch it deserves

**European Copper** 

the finishing

with Isokern's

**Chimney Pots.** 

The patented, European

meet the highest technical

standards through it's UL-

with International Building

Codes. The European Copper

chimney pots are unique in that they are compatible with both masonry and metal flue, giving you more options and a

Listing and compliance

consistent quality look.

**Copper Chimney Pots** 

#### Pawn

COPPER: EC-O-1924-1-CO GRAY: EC-O-1924-1-GR Height 25" Base 20"







The Lightweight Venting Solution that uses a locking-tab design, ensuring immediate and tight assembly.

With a 12 5/8" inner diameter and a 15 5/8" outer diameter, it is rated for any solid fuel Isokern Fireplace. This versatile system has been tested and approved for use with Isokern Standard and Magnum fireplaces in typical OR Fire-Lite applications. Available in aircooled (EcoSteel) or insulated (EcoSteel+).

#### **EcoSteel**



#### Air-Cooled **Chimney Flue**

6" - 13ACECO6

12" - 13ACECO12

18" - 13ACECO18

36" - 13ACECO36

48" - 13ACECO48



Air-Cooled **Anchor Plate** 

13ACECOAP



**Air-Cooled Anchor Plate with Damper** 

13ACECOAPD



**Air-Cooled** 15° Offset

**13ACECO15OS** 



**Air-Cooled** 30° Offset

13ACECO30OS

EcoSteel+



#### **Insulated Chimney** Flue - Stainless Steel

6" - 13INECO6

12" - 13INECO12

18" - 13INECO18

36" - 13INECO36

48" - 13INECO48



**Insulated Anchor** Plate - Stainless Steel

13INECOAP



**Insulated Anchor Plate with Damper** 

-Stainless Steel 13INECOAPD



**Insulated 15° Offset** 

-Stainless Steel

**13INECO15OS** 



**Insulated 30° Offset** 

-Stainless Steel

13INECO30OS





**Round Chimney Cap** Stainless Steel

13ACECOCC



**Chase Flashing** 



13ACECOFC



Rain Cap for Shroud Installation



13ACECORC



**Wall Band** 13ACECOWB



**Tall Cone Flashing** 



13ACECOFT



**Support Band** 13ACECOSB



Storm Collar 13ACECOSC



1/12 to 5/12 Flashing 13ACEOF



**Attic Insulation Shield** 13ACECOIS

**Firestop Assembly** 

Stainless Steel

13ACECOFS



Adjustable Support 13ACECOAS



6/12 to 10/12 Flashing 13ACECOF10

earthcore

earthcore





#### CLIP STYLES:

Use: Slide the appropriate clip over the junction of 2 adjacent panels for holding them together while the mortar is applied.











"T" Clip










90° Clip

Earthcore has streamlined the construction of building the classic culinary outdoor kitchen for quick assembly.

Using our Isokern Panels and Clips, building a beautiful, durable and practical outdoor kitchen is easier than ever. The Isopanels will also support the Iso'ven for added options to construction.



## Isokern Panels Components

Each panel weighs only 100 lbs, so they're easily moved when assembling your new outdoor kitchen components.

#### **ACCESSORY KIT**

Experience the simple joys of fire in the easiest way imaginable. Enhance your cooking pleasure with the Iso'ven Accessory Kit, which includes a wide array of tools specifically for cooking with your Iso'ven Wood Burning Pizza Oven.

The user-friendly, remarkably affordable outdoor wood burning pizza oven made from our exclusive volcanic material.

Created for easy installation, the Iso'ven Wood Burning Pizza Oven comes with everything you need to get started, including an accessory package of helpful cooking tools.



#### Includes:

- 1. Utility Tong
- 2. (2) 12" Pizza Screens
- 3. 26" Pizza Peel
- Stainless Steel Mixing Paddle



# Optional Storage Base

The ideal companion for your Iso'ven Wood Burning Pizza Oven — our Optional Storage Base. It allows you to choose the height of your Iso'ven in relation to the rest of your outdoor kitchen or living space. Installed as-is, with no customization, our Iso'ven base is the perfect height to pair with one of our Isokern outdoor fireplaces.

## Oven **Hood**

Following the classic approach of traditional wood burning ovens, the Iso'ven is designed to vent through the front. But at Earthcore, we believe customization creates satisfaction. So, if you prefer a flue, we now offer a Hood for Iso'ven designs, giving you the freedom to finish it in your own personal style.



We know the possibilities are limitless when it comes to building your outdoor **Dream Kitchen with our Isopanels.** 

That's why we've put together a few examples for you to choose from, along with specifications and installation materials needed.











8 - STRAIGHT Clips

4 - 45° Clips

1 - EM 40 Mono Flue Cap

A

